

Low-G PRECISION LOW PHASE NOISE OCXO MV341M

Features:

- Standard frequency: 10.0 MHz
- Ultra low phase noise level close to the carrier
- Short term stability (Allan deviation) per 1 sec: up to 1.5×10^{-13}
- Package size: 50.8x50.8x16 mm
- High stability vs. temperature: up to $\pm 1 \times 10^{-9}$
- High long term stability: up to $\pm 1 \times 10^{-8}$ /year
- Power supply: 12 V
- Available as RoHS

ORDERING GUIDE: MV341M-C 2 D-10.0M-LN-1.5E-9/G


Availability of certain stability vs. operating temperature range		$\pm 5 \times 10^{-9}$	$\pm 3 \times 10^{-9}$	$\pm 2 \times 10^{-9}$	$\pm 1 \times 10^{-9}$
A	0...+55°C	A	A	A	A
B	-10...+60°C	A	A	A	A
C	-20...+70°C	A	A	A	A
D	-40...+70°C	A	A	A	A
EX	-40...+85°C	A	A	A	A

A – available, C – consult factory

Availability of certain aging values for certain frequencies		10 MHz
F	$\pm 5 \times 10^{-8}$ /year	A
E	$\pm 3 \times 10^{-8}$ /year	A
D	$\pm 2 \times 10^{-8}$ /year	A
C	$\pm 1 \times 10^{-8}$ /year	C

Phase noise, dBc/Hz:	-	LN	ULN
0.01 Hz	-	-	≤ -37
0.1 Hz	<-80	<-85	≤ -88
1 Hz	<-113	<-116	$\leq -119 \dots -120$
10 Hz	<-138	≤ -139	≤ -140
100 Hz	<-154	<-157	<-157
1000 Hz	<-160	<-160	<-163
10000 Hz	<-163	<-165	<-167

Package drawing:

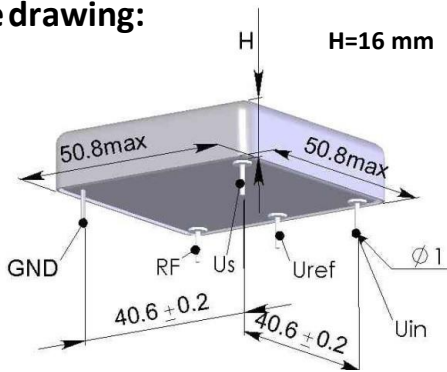

Pin	OCXO's Pins Destinations
GND	Ground (case)
RF	RF output
Us	Power supply
Uref	Reference voltage output
Uin	Control voltage input or not connected

Vibrations:	
Frequency range	10-500 Hz
Acceleration	5 g
Shock:	75 g/ 3±1 ms
Humidity @ 25 °C	98%
Storage temperature range	-55...+85°C

Short term stability (Allan deviation) per 1 sec: Option for LN and ULN	< 5×10^{-13} (5E-13) < 3×10^{-13} (3E-13)
Frequency stability vs. load changes ($\pm 5\%$)	< $\pm 5 \times 10^{-10}$
Frequency stability vs. power supply changes ($\pm 5\%$)	< $\pm 5 \times 10^{-10}$
Warm-up time within accuracy of $\pm 2 \times 10^{-8}$ @ 25°C	< 5 min
Power supply (Us)	12 V $\pm 5\%$
Steady state current consumption @ +25°C	< 300 mA
Peak current consumption during warm-up *	< 600 mA
Frequency pulling range	> $\pm 3 \times 10^{-7}$
Control voltage range (Uin)	0...5 V
Reference voltage (Uref)	+5 V
G-Sensitivity	< 1.5-9/G
Option	< 1E-9/G
Option	< 5E-10/G

Output	SIN
Level	>400 mV
Load	50 Ohm $\pm 5\%$
Harmonics	> 30 dBc

* - for the oscillators with the lower operating temperatures >-20°C

Additional notes:

For non-standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C.

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85



1750 Meridian Ave. #5128, San Jose, CA 95150
Tel: 408-329-8108, Email: sales@morion-us.com

Due to continuous development and improvement Morion, Inc. reserves the right to modify design or specifications of its products without prior notice

Revision 4. December 2019